

储能连接器

高松全新开发200A储能连接器，符合UL4128标准设计，为储能行业提供安全可靠连接。

三防一转


- 防错插：正负极防插错设计，防止人员失误错插。
- 防水防尘：IP67防护等级。
- 防触电：插座防触电保护设计。
- 可旋转：插头和插座可360°旋转，满足客户不同布线需求。
- 插座单颗防水。
- 插座尾端接线方式有螺纹、压接、Busbar三种可选。

Energy storage connector

Designed according to UL4128, the newly developed 200A connector of DEGSON can provide a safe and reliable connection for the energy storage industry.

The main features


- Positive and negative mis-plug proof design, mismatching prevention.
- IP67 protection level, waterproof and dustproof.
- The socket Protection against electric shock.
- 360° rotated plug and socket to meet different wiring demands of customers.
- Waterproof socket.
- Three wiring method of socket tail : screw, crimp, and Busbar.

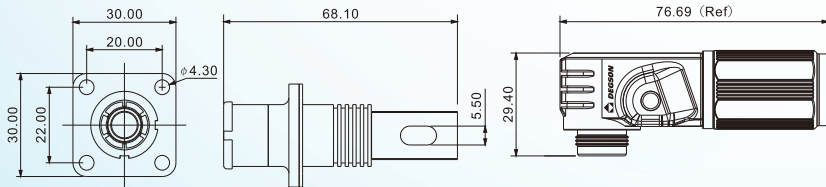

特点 Features



正负极防插错设计
Positive and negative mis-plug proof design

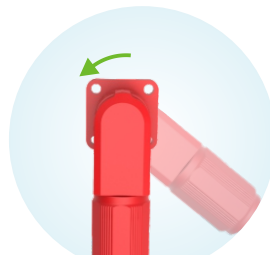

插头和插座可360°旋转
360° rotated plug and socket



插座尾端接线方式有
螺纹、压接、Busbar三种可选
Three wiring method of socket tail

应用 Application



产品性能 Technical data

UI4128 标准电气参数 UL4128 Standard electrical parameters			其它性能 Other Information	
接线范围 cross section	35mm ²	50mm ²	防护等级 Protection level	IP67
电流 Rated current	150A	200A	机械寿命 Mechanical life	>100 cycles
电压 Rated voltage	1000V DC		绝缘材料 Insulating material	PA+GF
			使用温度 Ambient temperature	-40-125°C

储能连接器

Energy storage connector

